


72035|009006

097203

CATALOGUE PRICE-LIST

Chimiver[®]
"Il mondo del parquet"

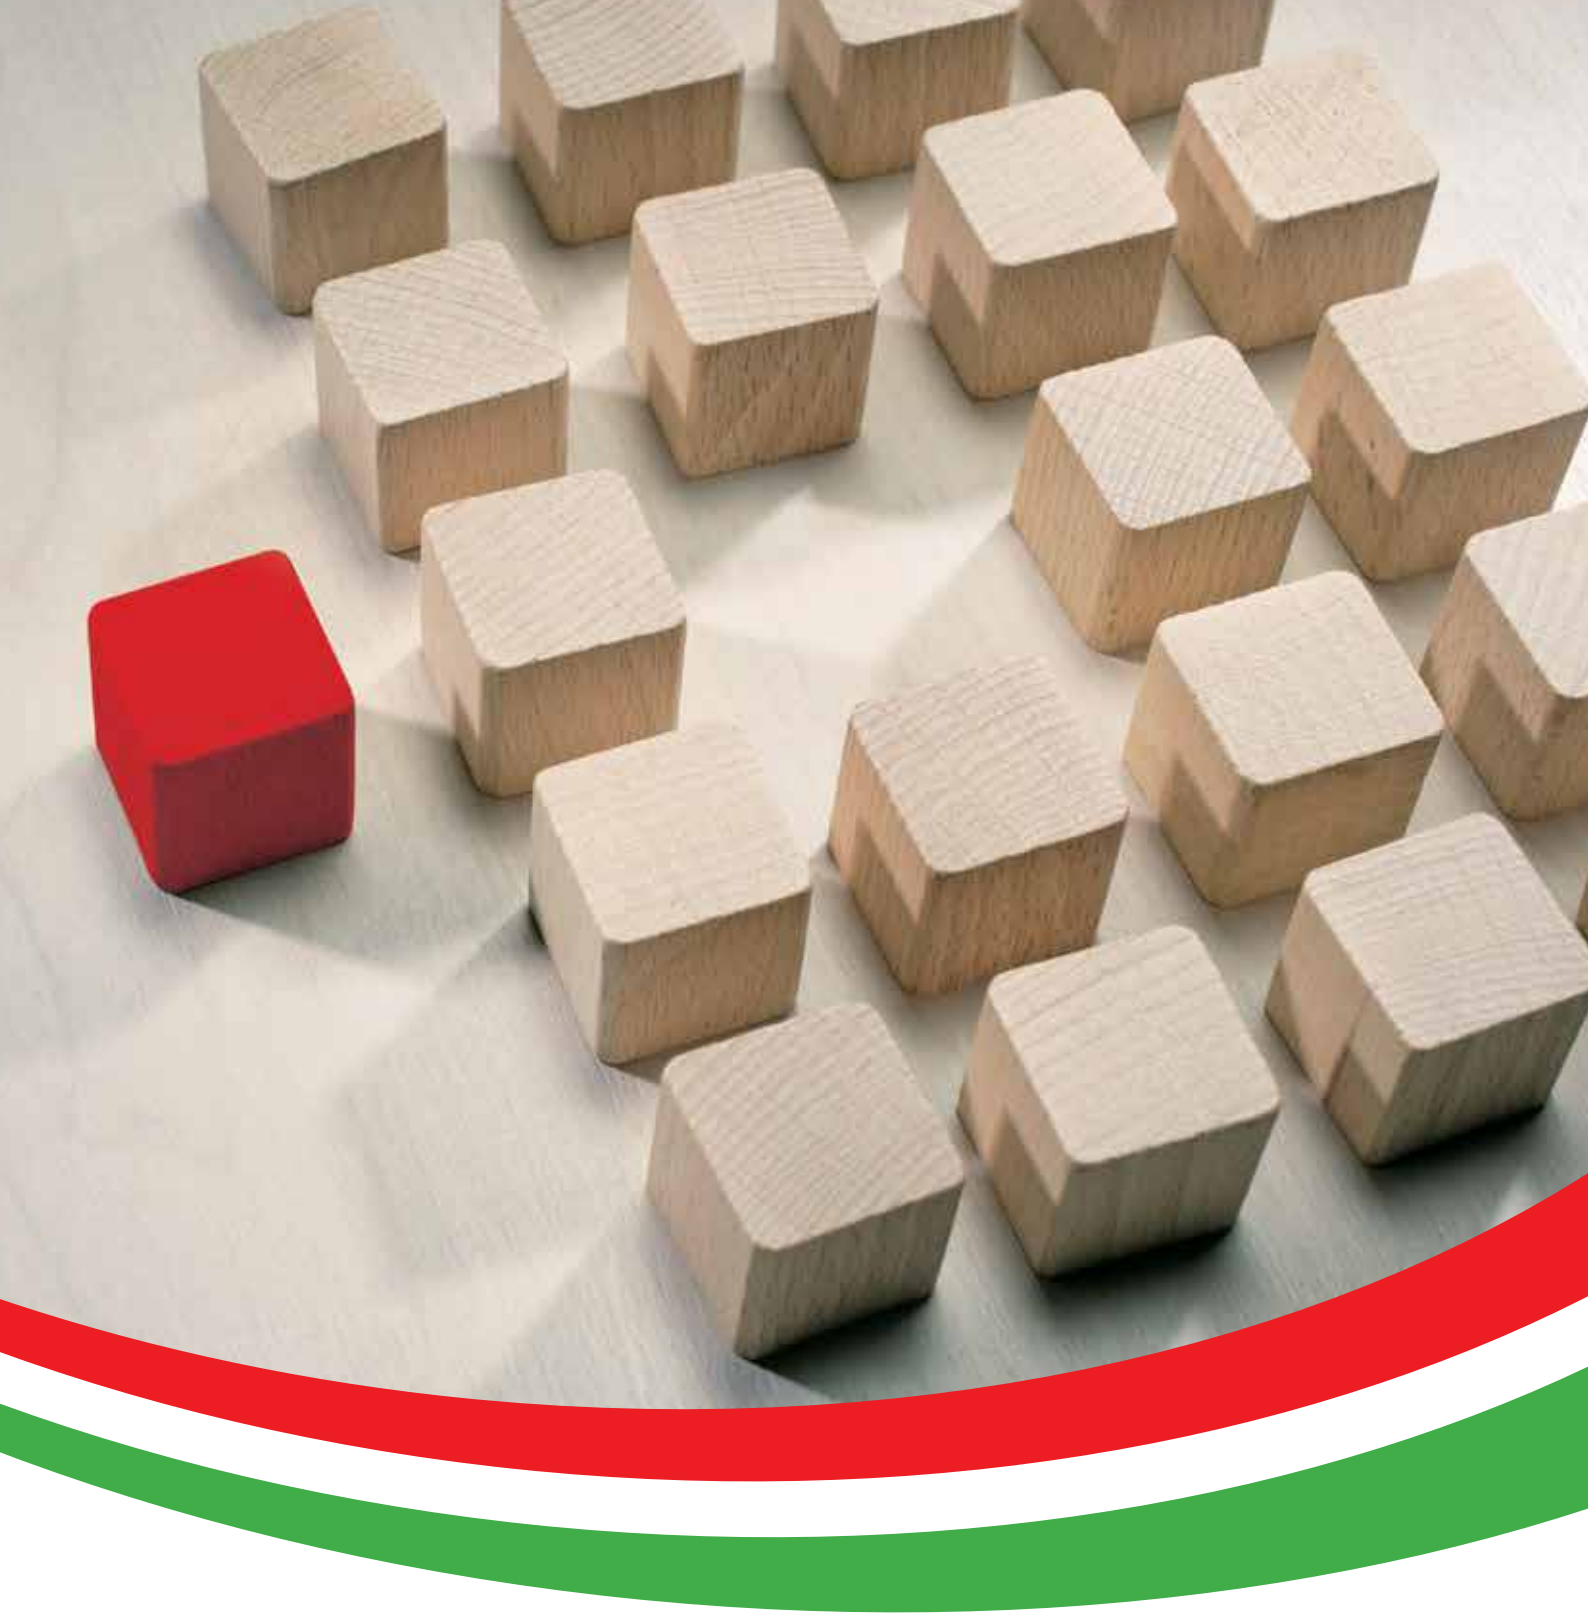

WHEN A PARQUET PRODUCT IS MADE BY **CHIMIVER**,
ALL OTHERS LOOK THE SAME.

*Dear customer, if you don't find the product you are interested in,
please call us, **we are interested!***

WATER-BASED PRIMERS	■	4
WATER-BASED LACQUERS	■	8
URETHANE OILS AND ACID CURING - LIOS NATURAL OILS	■	9
OUTDOOR LINE	■	14
FIRE-RETARDANT LACQUERS	■	17
CHIM TABU CYCLE	■	18
CARE LINE	■	19
SUBFLOOR REPAIRS	■	22
ADHESIVES	■	24
ADHESIVES FOR RESILIENT FLOORS	■	28
MORTARS	■	29
THINNERS	■	30
DYES AND STAINS	■	32
AUXILIARY PRODUCTS	■	33
ACCESSORIES - WORKING TOOLS	■	35
MOISTURE METERS	■	38
ABRASIVE RANGE	■	39

The beginning... the 60ies...



Nowadays...



...a company always going ahead!

WATER-BASED PRIMERS

water-based primers



ECOFILL



Water-based joint and hole fast drying filler. Higher filling capacity.

ECOCROM



1K water-based super toning primer with high coverage, to be used as first coat. It gives the wood a very warm colour, especially on oak. It doesn't leave overlaps and has excellent sanding properties.

ECORAPID 1H SUPER RAPIDO ZCH



1K very fast drying water-based acrylic primer.

ECOPRIME HS 120 (A+B)



2K water-based PU-Acrylate primer. High solid content. It provides the wood an additional tonality, and thanks to its chemical characteristics it improves wear resistance.

MIXING RATIO	Single-component	Single-component	Single-component	5:1
APPLICATION	Smooth trowel	Roller - Brush	Roller - Brush	Roller - Brush
COVERAGE g/m ²	n.a.	80 - 120	80 - 120	80 - 120
DUST DRY	n.a.	45 mins	10 mins	45 mins
FINGERPRINT DRY	n.a.	1 h 30 mins	15 mins	1 h 30 mins
SANDING	From 40 mins to 60 mins	12 h	30 mins	From 12 h to 24 h
OVERCOATING WITHOUT SANDING	n.a.	From 2 h to 4 h	30 mins	n.a.
WOOD OXIDATION	n.a.	Excellent	Low	Good
PORE FILLING	n.a.	Excellent	Good	Fair
NOTES	Test first on woods containing tannin (e.g. oak, chestnut).	Very good on exotic woods.	Test first on woods containing tannin (e.g. oak, chestnut).	Test first on woods containing tannin (e.g. oak, chestnut).

PACKAGING L	10	5			5				5				5+1			
PIECES PER CARTON	-	-			3				3				3A + 3B			
EURO PALLET WEIGHT	L 440	L 600			L 480				L 480				L 576			

ECOSTAR



1K water-based PU-Acrylate lacquer, odorless with high solid content. It has a good resistance to wear and gives a pleasant final look. It provides a warm aspect and a light tone.

ECOGREEN



1K water-based semi-glossy lacquer characterized by a high solid content, excellent wear and water resistance, excellent adhesion and absence of formaldehyde and heavy metals. It gives the wood a warm and slightly oxidized appearance.

Certified ECOLABEL
(www.ecolabel.eu).

Meglio per l'ambiente...

Better for the environment...

- Buone prestazioni per uso interno
- Uso limitato di sostanze pericolose
- Basso contenuto di solventi

- Good performance for indoor use
- Restricted hazardous substances
- Low solvent content

...better for you.

...e anche per te.

EU Ecolabel: IT/007/013

MIXING RATIO	Single-component	Single-component
APPLICATION	Roller - Brush	Roller - Brush
COVERAGE g/m ²	80 - 100	80 - 100
DUST DRY	40 mins	40 mins
FINGERPRINT DRY	2 h	2 h
PORE FILLING	Excellent	Excellent
NOTES	Test first on woods containing tannin (e.g. oak, chestnut).	Test first on woods containing tannin (e.g. oak, chestnut).
MACHINE SANDING	12 h	12 h
OVERCOATING WITHOUT SANDING	From 2 h to 4 h	From 2 h to 4 h
CHEMICAL/PHYSICAL RESISTANCES	Good	Good
WOOD OXIDATION	Light	Light
GLOSS LEVEL	60 LD - 40 SL 20 OP - 13 S.OP	40

PACKAGING L	5				5			
PIECES PER CARTON	3				3			
EURO PALLET WEIGHT	L 480				L 480			



ECOSTAR 2K LD (A+B)



2K water-based PU glossy lacquer (10:1). It has a high solid content and provides the wood a warm aspect and a light tone. Suggested for treatment of wooden floors in commercial premises or wherever a high resistance to wear is required. Total resistance to the "black heel mark".

ECOSTAR 2K SL (A+B)



2K water-based PU semi glossy lacquer (10:1). It has a high solid content and provides the wood a warm aspect and a light tone. Suggested for treatment of wooden floors in commercial premises or wherever a high resistance to wear is required. Total resistance to the "black heel mark".

ECOSTAR 2K OP (A+B)



2K water-based PU matt lacquer (10:1). It has a high solid content and provides the wood a warm aspect and a light tone. Suggested for treatment of wooden floors in commercial premises or wherever a high resistance to wear is required. Total resistance to the "black heel mark".

ECOSTAR 2K SUPER OP (A+B)



2K water-based PU super matt lacquer (10:1). It has a high solid content and provides the wood a warm aspect and a light tone. Suggested for treatment of wooden floors in commercial premises or wherever a high resistance to wear is required. Total resistance to the "black heel mark".

MIXING RATIO	10:1	10:1	10:1	10:1
APPLICATION	Roller - Brush	Roller - Brush	Roller - Brush	Roller - Brush
COVERAGE g/m ²	60 - 80	60 - 80	60 - 80	60 - 80
DUST DRY	30 mins	30 mins	30 mins	30 mins
FINGERPRINT DRY	2 h	2 h	2 h	2 h
POT-LIFE useful life of the A+B mix	2 h	2 h	2 h	2 h
PORE FILLING	Excellent	Excellent	Excellent	Excellent
MACHINE SANDING	24 h	24 h	24 h	24 h
NOTES	Test first on woods containing tannin (e.g. oak, chestnut).	Test first on woods containing tannin (e.g. oak, chestnut).	Test first on woods containing tannin (e.g. oak, chestnut).	Test first on woods containing tannin (e.g. oak, chestnut).
OVERCOATING WITHOUT SANDING	From 4 h to 12 h	From 4 h to 12 h	From 4 h to 12 h	From 4 h to 12 h
CHEMICAL/PHYSICAL RESISTANCES	Excellent	Excellent	Excellent	Excellent
WOOD OXIDATION	Light	Light	Light	Light
GLOSS LEVEL	80	40	20	8

PACKAGING L	5+0,5				5+0,5					5+0,5					5+0,5				
PIECES PER CARTON	3A + 3B				3A + 3B					3A + 3B					3A + 3B				
EURO PALLET WEIGHT	L 528				L 528					L 528					L 528				

ECOSTAR 2K NATURAL



2K water-based PU lacquer (10:1) with natural wood look effect. The wood results not oxidized and super matt. Suitable for heavy traffic floors. Based on nanotech particles, higher resistances!

ECOSTAR 2K ANTIBATTERICA



2K water-based PU matt lacquer (10:1) with bactericidal efficacy. It's recommended for residential use, particularly in public building.

ECOPRIME 2K SPORT



2K water-based primer (5:1) for treatment of wooden sport floors. It meets the slip resistance required by EN 14904 standard.

ECOSTAR 2K SPORT



2K water-based PU finish (10:1) for wooden sport floors in conformity with EN 14904 anti-slip standard requirements.

ECOSTAR 2K ANTIBATTERICA PER PAVIMENTI IN RESINA



2K water-based PU lacquer (10:1) for resin floors, with bactericidal efficacy. It's recommended for residential use, particularly in public building. Applied on various surfaces, it creates a smooth, transparent, tough, walkable, resistant chemicals and cold liquids and resistant to abrasion coating.

10:1	10:1	5:1	10:1	10:1
Roller - Brush	Roller - Brush	Roller - Brush	Rullo	Roller - Brush
60 - 80	60 - 80	80 - 120	60 - 80	80 - 100
30 mins	30 mins	45 mins	35 mins	30 mins
2 h	2 h	1 h 30 mins	2 h	2 h
2 h	2 h	1 h 30 mins	2 h	2 h
Good	Excellent	Fair	Excellent	Excellent
24 h	24 h	12 - 24 h	24 h	12 h
Test first on woods containing tannin (e.g. oak, chestnut).	Test first on woods containing tannin (e.g. oak, chestnut).	Test first on woods containing tannin (e.g. oak, chestnut).	Test first on woods containing tannin (e.g. oak, chestnut).	Test first on woods containing tannin (e.g. oak, chestnut).
From 4 h to 12 h	From 4 h to 12 h	n.a.	From 4 h to 12 h	From 4 h to 12 h
Excellent	Excellent	-	Excellent	Excellent
Absent	Light	Good	Light	Light
5	80 LD - 20 OP	-	20	80 LD - 20 OP

5+0,5				5+0,5				5+1				5+0,5				5+0,5			
3A + 3B				3A + 3B				3A + 3B				3A + 3B				3A + 3B			
L 528				L 528				L 528				L 528				L 528			

POLIFILM TP 10 LEGASTUCCO®



1K solvent-based joint and hole filler. Ready to mix with sanding dust from the floor. Suitable for filling wooden floors or gaps between floor boards giving wooden floors smooth finish.

WR 306 (A+B)



2K solvent-based PU primer with very high solid content and medium drying time. Easy to sand and completely shrink-free.

DUROLACK MC 50 LD (A+B) MC 50 SATINATA (A+B)



2K PU lacquer (1:1) with a high solid content.

DUROLACK MC 55



1K polyurethane lacquer characterised by high scratch resistance, elasticity and surface hardness.

MIXING RATIO	Single-component	1:1	1:1	Single-component
APPLICATION	Smooth trowel	Roller - Brush	Roller - Brush	Roller - Brush
COVERAGE g/m ²	n.a.	100-120	100	100
DUST DRY	n.a.	30 mins	1 h 30 mins	1 h
FINGERPRINT DRY	n.a.	2 h	6 h	4 h
POT-LIFE useful life of the A+B mix	From 20 mins to 30 mins	1 h 30 mins	4 h	n.a.
SANDING	n.a.	12 h	24 h	24 h
GLOSS LEVEL	n.a.	n.a.	95 LD - 75 SATINATA	95 LD - 70 SL- 55 OP
CHEMICAL/PHYSICAL RESISTANCES	n.a.	n.a.	Excellent	Excellent
PORE FILLING	n.a.	Excellent	Good LD Excellent SATINATA	

PACKAGING L	12,5	5			12,5 + 12,5	5+5			12,5 + 12,5	5+5			5		
PIECES PER CARTON	-	-			-	-			-	-			-		
EURO PALLET WEIGHT	L 750	L 660			L 750	L 660			L 750	L 660			L 700		

OIL WOOD TRAFFIK
LD/SL/OP



1K solvent-based oil-urethane lacquer for wooden floors. Excellent surface finish with waxed/oiled effect. Ideal for flamed woods. HIGH ABRASION RESISTANCE.

OIL WOOD TRAFFIK
SUPER OP



1K solvent-based oil-urethane extra matt lacquer for wooden floors. Excellent surface finish with waxed/oiled effect. Ideal for flamed woods. GOOD ABRASION RESISTANCE.

SUPER AMBERLACK
LD/SL/OP (A+B)



2K solvent-based acid curing lacquer. Highly resistant to wear and foot traffic. Low formaldehyde emission. Prevents woodstains from running.

MIXING RATIO	Single-component	Single-component	10:1
APPLICATION	Roller - Brush	Roller - Brush	Roller - Brush
COVERAGE g/m ²	100	100	80 - 100
DUST DRY	3 h	3 h	LD 1 h - SL 50 mins OP 50 mins
FINGERPRINT DRY	6 h	6 h	4 h
SANDING	24 h	24 h	24 h
GLOSS LEVEL	45 LD - 35 SL - 15 OP	<10	LD 95 - SL 55 - OP 30
CHEMICAL/PHYSICAL RESISTANCES	Very good	Very good	Good
PORE FILLING	Good	Good	Fair

PACKAGING L	12,5	5			12,5	5			10+1			
PIECES PER CARTON	-	-			-	-			2A 12B			
EURO PALLET WEIGHT	L 750	L 660			L 750	L 660			L 600			

Lios
BIOIL Natural



Natural oil treatment.



Lios
BIOIL Castagno



Natural oil treatment.
Chestnut colour.



Lios
BIOIL Larice



Natural oil treatment.
Larch colour.



Lios
BIOIL Cedro




Natural oil treatment.
Cedar colour.



Lios
BIOIL Autunno



Natural oil treatment.
Autumn colour.



PACKAGING L	1			1			1			1		
PIECES PER CARTON	9			9			9			9		
EURO PALLET WEIGHT	L 432			L 432			L 432			L 432		

Lios
BIOIL Oliva




Natural oil treatment.
Olive colour.



Lios
BIOIL Ciliegio




Natural oil treatment.
Cherry colour.



Lios
BIOIL Vecchio
Rovere



Natural oil treatment.
Old oak colour.



Lios
BIOIL Noce Old



Natural oil treatment.
Old walnut colour.



Lios
BIOIL Grigio



Natural oil treatment.
Grey colour.




PACKAGING L	1			1			1			1		
PIECES PER CARTON	9			9			9			9		
EURO PALLET WEIGHT	L 432			L 432			L 432			L 432		

Lios BIOIL Fumé



Natural oil treatment. Smoked colour.



Lios BIOIL Noce Classic



Natural oil treatment. Classic walnut colour.



Lios BIOIL Bianco



Natural oil treatment. White colour.



Lios BIOIL Super Bianco



Natural oil for the treatment of wooden floors, characterized by reduced oxidation and yellowing. High white yield.



Lios BIOIL Nero



Natural oil treatment. Black colour.



PACKAGING L	1			1			1			1		
PIECES PER CARTON	9			9			9			9		
EURO PALLET WEIGHT	L 432			L 432			L 432			L 432		

Lios BIOIL Wengé




Natural oil treatment. Wengé colour.



Lios BIOIL Teak



Natural oil treatment. Teak colour.



Lios BIOIL a Campione



Natural oil treatment. Colour on request.

Lios BALM fissativo



Protective natural oil.

PACKAGING L	1			1			1			2		
PIECES PER CARTON	9			9			9			6		
EURO PALLET WEIGHT	L 432			L 432			L 432			L 480		

Lios

Natural Treatment & Maintenance

WAX AND OIL APPLICATOR



Lios HARD WAX



Product based on natural and vegetable oils and waxes for wooden floors. It provides the treated surface a brilliance and excellent chemical and physical resistance.

Lios HARD WAX BIOIL



Hard Wax based on natural oils for wooden floors. It gives the wood a satin and uniform aspect with excellent characteristics of water repellence. It keeps the wood with its original tone.

Lios HARD WAX BIOIL 90



Product based on vegetable oils and natural waxes with high melting point. It gives the wood a satin and uniform aspect with excellent characteristics of water repellence, hardness and soft touch. It keeps the wood with its original tone. Suggested for surfaces exposed to heavy wear and traffic. Easy to be maintained. More than 90% of solid content, free of any mark of risk and danger. Ideal for "green building".

Lios HARD WAX BIOIL 3D



Product based on natural oils and waxes that gives to the treated wood a warm and smooth look, typical of natural oil finishes. Its excellent impregnating power makes it ideal for direct treatment of wood; the second coat protects and gives depth, enhancing the wood grain (3D). Lios Hard Wax Bioil 3D is eco & user friendly, nearly odorless. Can be used also for industrial application. **Available in matt and super matt versions.**



PRODOTTO CONFORME
ai criteri di
COMPATIBILITÀ AMBIENTALE
Attestato rilasciato dal Dipartimento BEST - Politecnico di Milano
CCA N. Registrazione 201215

ENVIRONMENTALLY COMPATIBLE PRODUCT
Attestation issued by Department BEST - Politecnico di Milano
CCA Registration No. 201215

PACKAGING L	5	1			5	1			5	1		
PIECES PER CARTON	4	12			4	12			4	12	-	12
EURO PALLET WEIGHT	L 600	L 480			L 600	L 480			L 600	L 480		

Lios Bianco Marsiglia



White primer applied to wood for double effect, decapé, white light.

Lios Bianco Marsiglia W only for industry



Water-based stain for "single effect" and "double effect".

Lios Noce 10 only for industry



Water-based stain with deep penetration.

Lios Noce 30 only for industry



Water-based stain with deep penetration.

Tracciatore Bianco Plus



Water-based solution able to enhance the colour of white over the wooden floors treated with Lios BIOIL Bianco.

PACKAGING L	5	1		5			5			5	1	
PIECES PER CARTON	-	12		-			-			-	12	
EURO PALLET WEIGHT	L 700	L 576		L 700			L 700			L 700	L 576	

Lios Noce Toscana only for industry



Antiquing solution for oak.

Lios Larice Antico only for industry



Antiquing solution for larch, pine and fir wood.

Lios Rovere Metal only for industry



Solution for oxyferrous metal effect.

Lios RAINBOW only for industry



Water-based oxydating solution for wooden spieces containing tannin (oak and chestnut); the product is enhancing the natural wood grain texture giving a unique tridimensional effect.

Stucco spatolabile Metal (A+B)



2K polyester based paste filler. Available colours: oak, walnut, douglas, pine.

PACKAGING L	5			5			5			1			A: Kg 1 B: gr 30
PIECES PER CARTON	-			-			-			10			20
EURO PALLET WEIGHT	L 700			L 700			L 700			-			Kg 320

DECKING

OUTDOOR line

Lios SUNDECK WOOD OIL



Outdoor wood impregnator particularly recommended for treatment of outdoor wooden floors.

Lios SUNDECK WOOD OIL LIGHT



Outdoor wood impregnator for the treatment of outdoor wooden floors. It is particularly indicated for the treatment of south-american species (i.e. IPÈ Lapacho, Tobacco etc.).

Lios SUNDECK WOOD OIL NO SLIP 14342



Antislip oil impregnator for outdoor wooden floors. Its particular formulation based on natural oils and polycarbonates, gives the product particular antislip characteristics both on dry and wet wooden floors (see the certificates).

Lios SUNDECK WOOD OIL IGNIFUGO



Fire retardant oil impregnator for outdoor wooden floors. It is certified fire class CflS1 according to testing methods EN ISO 9239-1 and EN ISO 11952-2.

PACKAGING L	5	1			5	1			5	1			5	1		
PIECES PER CARTON	4	12			4	12			4	12			4	12		
EURO PALLET WEIGHT	L 600	L 480			L 600	L 480			L 600	L 480			L 600	L 480		

DECKING

Lios SUNDECK W OIL



Water emulsified oil impregnator, particularly recommended for treatment of outdoor wooden deckings, swimming pool edges, verandas, walkways, window and door frames, fences and canopies. **Available in different versions: standard/light/coloured: white-grey/no slip/antibacterial.** CERTIFICATION NO SLIP ACCORDING B.C.R.A. For Sundeck W Oil coloured version apply firstly one coat of DECKING FONDO PRYMER (pack 5L €29,30/L).

Lios SUNDECK SOAP



Nourishing detergent to clean outdoor wooden floors.

Lios GRIGIOFF



Solution that transforms grey, weathered decking back to its original appearance. Certified biodegradable and ecotoxic.



KIT MAINTENANCE



- Contains:
- 1L Sundeck Soap
 - 1L Sundeck Wood Oil
 - 1 Brush
 - 1 Maintenance Cloth
 - 1 Pair of Outdoor gloves

KIT REFITTING



- Contains:
- 1L Grigioff
 - 1L Sundeck Wood Oil
 - 1 Brush
 - 1 Paint Brush
 - 1 Pair of Outdoor gloves

5	1	5	1	5	1
4	12	-	12	-	16
L 600	L 480	L 700	L 480	L 700	L 512

OUTDOOR line

PRYMER ELASTOXYL



Primer used to obtain good performance and excellent adhesion on porous surfaces and on greasy wood species (i.e. Teak).

ELASTOXYL



Expansion joint sealant for outdoor floors.
Colours: black - teak - white - grey.

SPAGHETTO DECK



Round section polyethylene sponge rope for filling expansion joints. Fill the remaining space with Elastoxyl.

CARDBOARD DISPLAY STAND



USEFUL ADVICE	Degrease the surface with ACETONE thinner before application.		Smooth the joint with a trowel after application.		-		
PACKAGING L	1		Nr. 1 sausage 600 ml	Nr. 1 cartridge 290 ml	ml 1 diameter 8 mm	ml 1 diameter 10 mm	ml 1 diameter 15 mm
PIECES PER CARTON	10		20	12	ml 1.500	ml 550	ml 550
EURO PALLET WEIGHT	L 500		Nr. 1000	Nr. 1460	-	-	-

FACADES

SUNDECK CLIM A+



Water based oil impregnator with UV absorption double technology; recommended for treatment of wooden boards used for ventilated facades. Very good resistance to UV sun rays, to bad weather conditions and to sudden temperature changes.
Available in different versions: standard/light/coloured: white - grey - light-blue and green.
For Sundeck ClimA+ coloured version apply firstly one coat of DECKING FONDO PRYMER (pack 5L €29,30/L).

5	1
4	12
L 600	L 480

KIT FOR FACADES

Maintenance & Refitting Kit for facades



Contains:
- 1L Sundeck ClimA+
- 1L Grigioff
- 1 Brush
- 1 Paint brush
- 1 Pair of Outdoor gloves

SCUDO WPC



Protective water-based, water-repellent treatment for WPC (Wood Plastic Compound). It avoids formation of unaesthetic and persistent stains due to the absorption of oil substances and dirt.
Available as standard and antibacterial version.

5	1
-	12
L 700	L 480

PULITORE INTENSIVO WPC



Bactericidal hygienizing detergent recommended for intensive cleaning of WPC (Wood Plastic Compound).

5	1
-	12
L 700	L 480

WPC

OUTDOOR line

SCUDO INVISIBILE



Water and oil repellent invisible treatment for stone materials.

SIL CAR



Water-repellent silicone impregnator for outdoor and indoor stone, absorbent materials, plaster, asbestos cement, etc.

USEFUL ADVICE: contains silicone. Do not apply any lacquer nearby while SIL CAR has not dried.

ACRIL CAR



Stain-resistant treatment for stone, concrete surfaces, etc., situated indoor and outdoor. Protects from decomposition. It provides a slightly wet look. Not yellowing.

USEFUL ADVICE: it does not cause undesirable effects like cissing or orange-peel surface in parquet laquers.

VELUREX® Pulitore Neutro



Neutral no-aggressive detergent for all kind of stone.

PACKAGING L	5	1			25	10	5	1	12,5	5	1			1			
PIECES PER CARTON	4	12			-	-	4	10	-	-	10			12			
EURO PALLET WEIGHT	L 600	L 480			L 900	L 800	L 700	L 500	L 750	L 660	L 500			L 480			

VELUREX® Stone Clean



Acid detergent in aqueous solution. Works on traces of paint, efflorescences, rust and stains. Ideal for stone, marble, granite, brick and cement material.

VELUREX® Stone Clean Pro



Concentrated detergent for deep cleaning and degreasing of floors not protected by waxes. Also suitable for daily cleaning and maintenance of surfaces made of stoneware, marble, granite, slate, ceramic and concrete which are particularly difficult to clean.

VELUREX® Rimuovi Graffiti



Graffiti remover-gel for all types of surfaces (wall, stone, wood, cement, etc.).

KIT FOR STONE

Renew

- Contains:
- 1L Stone Clean
- 1L Scudo Invisible
- 1 Brush
- 1 Paint brush
- 1 Pair of gloves



KIT FOR STONE

Maintain

- Contains:
- 1L Pulitore Neutro
- 1L Scudo Invisible
- 1 Brush
- 1 Paint brush
- 1 Pair of gloves



CARDBOARD DISPLAY STAND



CE MARKING

FOR ENGINEERED PARQUET PRODUCERS

Bfl s1 - Cfl s1

According to standards:

EN ISO 9239-1

EN ISO 11925-2

DUROLACK RF 595 (A+B)



2K fire retardant PU lacquer (1:1) to give the first class to lacquering of wooden floors in all wood types according to the D.M. 6 March 1992 referring to the UNI standard 9796. **Available in SPORT version for sport facilities.** The lacquer surface film has good grip and "skid resistance" for sports like basketball, volleyball, handball, squash, roller hockey, etc. Approved by sport clubs. Increases surface hardness. Certified B.C.R.A. Method - Italian Ministerial Decree 14/6/89 N°236 (skid resistance with TORTUS), with result R10.

APIRO LACK RF 75 (A+B)



2K class 1 fire retardant PU lacquer containing oil-free polyesters, isocyanic thickeners, solvents, pigments, mattifying agents and fire-retardant compounds for fire retardant lacquering of wooden floors according to Italian Ministerial Decree 6 March 1992, which incorporates UNI standard 9796.

SISTEMA IGNIFUGANTE CH 21 SEALER RF 182 (A+B) TOP FINISH RF 299 (A+B)



Fire-retardant semi-gloss class 1 cycle consisting of SEALER RF 182 and TOP FINISH RF 299 for wooden floors in all wood types according to the D.M. 6 March 1992 referring to the UNI standard 9796.

ECOMAX RF 101 (A+B)



2K water-based PU lacquer. Fire retardant for lacquering all wooden floors and furnishings according to Italian Ministerial Decree 6 March 1992, which incorporates UNI standard 9796.

MIXING RATIO	1:1	2:1	2:1	10:1
APPLICATION	Roller - Brush Spray	Spray - Coating machine	Roller - Brush - Spray Coating machine	Roller - Brush Spray
TOTAL QUANTITY TO BE APPLIED (g/m ²)	450	400	420	240
DUST DRY	1 h 30 mins	1 h	Sealer RF182 30 mins Top Finish RF 299 20 mins	30 mins
FINGERPRINT DRY	6 h	3 h	Sealer RF182 1 h Top Finish RF 299 40 mins	2 h
POT-LIFE useful life of the A+B mix	3 h	3 h	2 h	2 h
PORE FILLING	Excellent	Excellent	Excellent	Excellent
SANDING	24 h	16 h	8 h	24 h
CHEMICAL/PHYSICAL RESISTANCES	Good	Good	Good	Excellent
GLOSS LEVEL	RF595 90 SPORT 50-75	35	35	15

PACKAGING L	12,5 + 12,5				Comp. A 10	Comp. A 10	Comp. A 10	Comp. B 5	SEALER 10+5	TOP FINISH 10+5			L 5+0,5			
PIECES PER CARTON	-												3A + 3B			

only for industrial applications

CHIM TABU PRYMER



1K non-yellowing synthetic primer of very good quality, to be used as a first coat for lacquering coloured or dyed wooden floors. It preserves the wood's original colour. Do not sand.

CHIM TABU FD + N.I. 600



2K non-yellowing aliphatic PU primer added with UV ray-absorbent elements. To be used as second coat for lacquering coloured or dyed wooden floors. It preserves wood's original colour.

CHIM TABU FT + N.I. 600



2K aliphatic PU matt finish, non-yellowing, high scratch-resistance added with UV ray absorbent elements. To be used as a third coat for lacquering coloured or dyed wooden floors. It preserves wood's original colour. Very good superficial appearance.

MIXING RATIO	Single-component	10:2,5 + 2,5 DMC 50	10:2,5 + 2,5 DMC 50
APPLICATION	Roller - Brush	Roller - Brush	Roller - Brush
COVERAGE g/m ²	70 - 80	100	100
DUST DRY	20 mins	30 mins	30 mins
FINGERPRINT DRY	1 h	2 h	2 h
POT-LIFE useful life of the A+B mix	n.a.	3 - 4 h	3 - 4 h
PORE FILLING	Fair	Good	Good
SANDING	Do not sand	24 h	24 h
CHEMICAL/PHYSICAL RESISTANCES	n.a.	n.a.	Excellent
GLOSS LEVEL	n.a.	n.a.	50 - 60

PACKAGING L	12,5				Chim Tabu FD 10	N.I. 600 2,5				Chim Tabu FT 10	N.I. 600 2,5			
PIECES PER CARTON	-				-	-				-	-			
EURO PALLET WEIGHT	L 750				L 600	L 660				L 600	L 660			

CARE LINE

lacquered wooden floors

VELUREX®

VELUREX® Cleaner Star



Neutral detergent for cleaning lacquered wooden floors. It can be also used on marble, ceramic, etc. Halos-free it sanitizes and leaves a pleasant fragrance in the ambient.

VELUREX® Cleaner Star Super Azione Battericida



Special neutro multipurpose detergent formulated with antibacterial and bactericidal active principles. Suitable for cleaning of lacquered wooden floors. It can also be used for cleaning of ceramic surfaces, marble, etc. It doesn't leaves stains, sanitizes and leaves a pleasant fragrance.

VELUREX® Polish WT



Water-based emulsion for the regular maintenance of lacquered wooden floors. It restores and nourishes at the same time, leaving a pleasant fragrance in the ambient.

VELUREX® Metal Matt



Metallized wax indicated for the intense maintenance of lacquered wooden floors. Its formula allows to protect and prolong the life of wooden floor, by giving to dull surfaces a new shine. The product has a matt finish and it is slip resistant. It can be applied also on PVC flooring.

PACKAGING L	25	10	5	1	25	10	5	1	1					1					
PIECES PER CARTON	-	-	-	12	-	-	-	12	12					12					
EURO PALLET WEIGHT	L 900	L 800	L 700	L 480	L 900	L 800	L 700	L 480	L 480					L 480					

VELUREX® Metal Lack



Metallized wax indicated for the intense maintenance of lacquered wooden floors. Its formula allows to protect and prolong the life of wooden floor, by giving to dull surfaces a new shine. The product has a glossy finish. It can be applied also on PVC flooring. **Available in NO SLIP version.**

VELUREX® DEWACHS



Concentrated detergent cleaner and waxremover for floors. It removes old layers of metallized (or other) waxes from wooden floors, rubber, vinyl, linoleum, etc.

MAINTENANCE KIT FOR LACQUERED WOODEN FLOORS



- Contains:
- 1 L Velurex Cleaner Star Neutral multi-purpose detergent
 - 1 L Velurex Polish WT Maintenance polish
 - 1 Microfiber Maintenance Cloth
- Free gifts:
- 5 scented wooden balls
 - 1 hand sanitizer gel

CARE LINE KIT FOR LACQUERED WOODEN FLOORS



1	NO SLIP 1			1															
12	12			12															
L 480	L 480			L 480															

CARE LINE

oiled wooden floors



Natural Treatment & Maintenance

LIOS Soft Balm



Both cleans and nourishes wooden floors due to its special formula containing treatment oil. If used regularly, Soft Balm keeps the floor looking even and enhances the wood's natural beauty.

LIOS Soft Balm Aloe



Natural nourishing soap with extracts of aloe vera suggested for cleaning of oiled wooden floors (natural oil treatment, UV curing or urethane treatment). LIOS Soft Balm Aloe both cleans and nourishes the wooden floors thanks to its special formula containing treatment oil. If used regularly, LIOS Soft Balm Aloe keeps the floor looking even and enhances the wood's natural beauty. The extracts of aloe, leave a pleasant refreshing fragrance granting a better nourishment to the floor.

LIOS Kronos



Special plant-based formula for intensive cleaning of wooden floors treated with natural oil. If used regularly, Kronos effortlessly removes even the toughest dirt. After cleaning, apply Soft Balm nourishing detergent and Talita maintenance oil if necessary.

LIOS Talita



Maintenance oil for wooden floors treated with natural oil. Use whenever your floor looks particularly worn or scored, especially in high traffic areas (like hallways, etc.). It leaves a "dry" finish with a slightly irregular appearance.

PACKAGING L	1				1				25	10	5	1	1			
PIECES PER CARTON	12				12				-	-	-	12	12			
EURO PALLET WEIGHT	L 480				L 480				L 900	L 800	L 700	L 480	L 600			

LIOS Ripristino



Oil/wax blend able to restore pre-oiled floors particularly worn-off. **Available in all Lios Bioil colours.** Colour on request.

LIOS Ritocco



Coloured refinisher with French polish formula. **Available in all Lios BIOIL colours.**

MAINTENANCE KIT FOR OILED WOODEN FLOORS



- Contains:
- 1 L Lios Soft Balm Nourishing detergent
 - 1 L Lios Kronos- Intensive cleaner
 - 1 Microfiber Maintenance Cloth
- Free gifts:
- 5 scented wooden balls
 - 1 hand sanitizer gel

CARE LINE KIT FOR OILED WOODEN FLOORS



1				Nr. 1			
12				-			
L 480				-			

CARE LINE

other products



VELUREX® Lamin Clean



A new product for cleaning laminate flooring as well all other hard surfaces, Lamin Clean; a pleasant smelling and hygienic cleaner that contains an antistatic emulsion which helps the prevention of dust build up. No rinsing is required.

VELUREX® Vinyl Cleaner



Bactericidal anti-static detergent suitable for cleaning vinyl flooring. The anti-static emulsion helps the absorption and prevention of dust build-up. Further more Vinyl Cleaner contains special nano particles which give to the treated surfaces a long lasting bactericidal action.

LIOS Natural Wax



Mixture of bees wax and carnauba wax. Ideal for maintenance of wooden floors and terracotta floors treated with wax.

LIOS Sol



Thinner for cleaning and dilution of: Lios Natural Wax, Lios Bioil, Lios Hard Wax, Lios Hard Wax Bioil 90, Lios Hard Wax Bioil 3D. Suitable for syntetic based products.

PACKAGING L	25	10	5	1	25	10	5	1	5	1			5	1		
PIECES PER CARTON	-	-	-	12	-	-	-	12	4	12			-	10		
EURO PALLET WEIGHT	L 900	L 800	L 700	L 480	L 900	L 800	L 700	L 480	L 600	L 480			L 560	L 500		

Spare cloths kit



Spare blistered kit with cleaning mop and microfiber maintenance cloth.

Spare cloths kit



Package of antistatic, antidust cloths (50 pcs.).

Graduated bucket



Spray Careline Double Mop



1		1		1		1										
12		20 pack of 50 pcs		12		-										
-		-		-		-										

WOULD YOU LIKE YOUR CUSTOMIZED LINE OF PRODUCTS?

All maintenance products and their display can be customized. Please ask for catalogue and prices at sales@chimiver.com



SUBFLOOR REPAIRS

**PRYMER
PUB 77**



1K solvent-based PU primer used for preventing rising damp in absorbent subfloors and strengthening friable subfloors. Adhesion promoter for anhydride subfloors, prevents dust and protects floor against harsh atmospheric agents present in industrial environments.

**PRYMER
SF 1105 (A+B)**



2K water-based epoxy primer suitable for restoring dusty subfloors and for preventing rising damp in absorbent subfloors.

**PRYMER
FAST 500**



Solvent and water free 1K PU primer with 100% solid content. Fast drying (45-50 mins) create a damp proof membrane (DPM) on humid subfloors. Certified: EC1R.

**PRYMER
100**



Solvent and water free 1K PU primer. Suitable to consolidate friable subfloors and create a damp proof membrane (DPM) on humid subfloors.

**PRYMER
W 30 K**



1K water-based silicate primer suitable for dusty, very dry and crumbling subfloors. Excellent penetrating properties.

MIXING RATIO	Single-component	1:1	Single component	Single component	Single component
APPLICATION	Roller - Brush	Roller - Brush	Roller - Brush	Roller - Brush	Watering can
COVERAGE g/m²	300 - 600	150 - 500	120 - 450	120 - 450	500 - 2000
POT-LIFE useful life of the A+B mix	n.a.	1 h	n.a.	n.a.	n.a.
TYPE OF ADHESIVE USED FOR LAYING	AD. 501 EP - AD. HERCULES AD. 327 - UNISIL - AD. ELASTIC	AD. 501 EP - AD. HERCULES AD. 327 - UNISIL AD. ELASTIC	AD. 501 EP - AD. HERCULES AD. 327 - UNISIL AD. ELASTIC	AD. 501 EP - AD. HERCULES AD. 327 - UNISIL AD. ELASTIC	AD. 501 EP - AD. HERCULES AD. 327 - UNISIL AD. ELASTIC
THINNING	DMC 50	Water	DMC 50	DMC 50	Do not dilute
NOTES AND WARNINGS	Before application, first check that the subfloor is insulated from the floor slab with a nylon sheet and does not contain lightening materials that can retain solvents. It resists counter-pressure in accordance with standard UNI 8298 part 8.	It resists counter-pressure in accordance with standard UNI 8298 part 8. DPM: use at least 400 g/m ² .	Anidryte and heating subfloors cannot be waterproofed. This note is valid for all primers. It resists counter-pressure in accordance with standard UNI 8298 part 8.	Anidryte and heating subfloors cannot be waterproofed. This note is valid for all primers. It resists counter-pressure in accordance with standard UNI 8298 part 8.	In case of dropping clean immediately.

PACKAGING KG	L 12,5	L 5			10+10			6	12			6	12		25
PIECES PER CARTON	-	-			-			-	-			-	-		-
EURO PALLET WEIGHT	L 750	L 660			Kg 800			Kg 840	Kg 960			Kg 840	Kg 960		Kg 900

**PRYMER
EPOX WETT (A+B+C)**



3K solvent and water free epoxy primer for preventing rising damp in non-absorbent subfloors (compacted or smoothed cement blocks, ceramic tiles, porcelain stone and marble, etc.).

**PRYMER
WB 328 S (A+B+C)**



3K water-based epoxy primer. Suitable for non-absorbent surfaces prepared for wooden floors.

LEVIGATORE LIQUIDO



Surface adhesion promoter activator agent for laying on non absorbent surfaces. It is a specific product studied to increase the adhesion of silane-based products (MS Technology). Easy, fast, safe, no more dust!

CHIMIGRIP



1K water-based adhesion promoter for levelling cement compounds to be used indoor on absorbent and non absorbent subfloors. It increases the adhesion of RASOCHIM AL to the existing subfloors; it is easy to be applied and odorless.

**PRYMER
W**



1K water-based acrylic primer for restoring friable subfloors. It can be added to cement mixtures to prevent cracking.

1 / 0,5 / 1,5	1,8 / 1,8 / 6	Single-component	Single-component	Single-component
Smooth spatula n° 3	Smooth trowel	Cloth	Roller	Roller - Brush
1000	500 - 1000	20 - 40	100 - 200	150 - 200
1 h	1 h	-	-	n.a.
AD. 501 EP - AD. HERCULES AD. 327 - UNISIL - AD. ELASTIC	AD. 501 EP - AD. HERCULES AD. 327 - UNISIL - AD. ELASTIC	UNISIL - ELASTIC	-	PARKETTKOLL
Do not dilute	Water	-	-	Water
It resists counter-pressure in accordance with standard UNI 8298 part 8.	It resists counter-pressure in accordance with standard UNI 8298 part 8.	After about 10 minutes and within 30 minutes apply ADESIVER ELASTIC or UNISIL (see technical data sheets). If 30 minutes after application have passed is necessary to repeat the application of LEVIGATORE LIQUIDO.	-	Dilute 1L of product - 5/6L of water before application.

6,7 + 3,3 + 10				1,8 + 1,8 + 6 +				5	1			5				25	10	5
-				-				-	10			-				-	-	-
-				-				L 495	L 500			L 600				Kg 900	Kg 800	Kg 700

PARKETTKOLL L



Vinyl adhesive in aqueous dispersion for gluing wood flooring blocks and mosaic patterns. Firm grip, resilient and resistant to ageing.

PARKETTKOLL TOP RU



Vinyl adhesive in aqueous dispersion with strictly controlled water content. Rapid grip for gluing all types of wooden floors. Ideal for wooden floor 14/17 mm thick. Highly resilient, retains its properties over the long term.

PARKETTKOLL LISTONI



Vinyl adhesive in aqueous dispersion with strong gripping power for gluing 17/22 mm wooden floor. Suitable for gluing on heated subfloors (underfloor heating). Permanent resilience and excellent adhesion.

PARKETTKOLL FLOT D/3



Vinyl adhesive in aqueous solution with no solvents suitable for gluing between tongue and groove of pre-finished wooden floors or laminated floors that have been laid on a "floating setting". Application: apposite small tube.

APPLICATION TEMPERATURE	+10°C ÷ + 25°C	+10°C ÷ + 25°C	+10°C ÷ + 25°C	+10°C ÷ + 25°C
APPLICATION	Notched trowel n° 5	Notched trowel n° 5	Notched trowel n° 5	Nozzle
OPEN TIME at +20°C and 65% R.H.	25 mins	15 mins	20 mins	10 mins
COMPLETE HARDENING	4 - 5 gg.	2 - 3 gg.	3 - 4 gg.	4 h
COVERAGE g/m²	900 - 1300	900 - 1300	900 - 1300	30 - 40
AVAILABLE COLOURS	Oak - Afrormosia Walnut	Oak - Afrormosia Walnut	Oak - Afrormosia Walnut	Transparent
STORAGE STABILITY	1 year	1 year	1 year	1 year
THINNING	n.a.	n.a.	n.a.	n.a.
TOOL CLEANING	Water	Water	Water	Water

PACKAGING KG	20	10			20	10			20	10			Nr. 1 (0,5 Kg)			
PIECES PER CARTON	-	-			-	-			-	-			12			
EURO PALLET WEIGHT	Kg 880	Kg 750			Kg 880	Kg 750			Kg 880	Kg 750			Nr. 1200			

ADHESIVES

2K reactive and synthetic

SIGOL (A+B)



2K epoxy-PU adhesive (9:1), free of solvents and water, to be used for gluing any type of wooden floor onto concrete subfloors, waterproof concrete and, with previous suitable treatment, onto not adsorbing preexisting floorings (ceramics, tiles, marble, palladian, gres, ect.). Potentially suitable for gluing onto heated subfloors. ODORLESS.

ADESIVER 501 EP (A+B)



2K epoxy-PU adhesive (9:1), free of solvents and water, to be used for gluing any type of wooden floor onto concrete subfloors, waterproof concrete and, with previous suitable treatment, onto not adsorbing preexisting floorings (ceramics, tiles, marble, palladian, gres, ect.). Suitable for gluing onto heated subfloors. ODORLESS.

ADESIVER HERCULES (A+B)



2K epoxy-PU adhesive (9:1), hypoallergenic, free of solvents and water, to be used specifically for gluing any type of wooden floor onto a concrete subfloors, waterproof concrete and, with previous suitable treatment, onto not adsorbing preexisting floorings (ceramics, tiles, marble, palladian, gres, ect.). Recommended for gluing onto heated subfloors. ODORLESS.

ADESIVER 327 PU (A+B)



2K PU anallergic adhesive. Suitable to lay traditional and pre-finished (pre-varnished) wooden floors of all shapes and sizes onto cement and waterproof cement floors.

ADESIVER STE



1K single-coat alcohol-based adhesive for glueing engeniereed wooden floors.

MIXING RATIO	9:1	9:1	9:1	9:1	Single-component
APPLICATION TEMPERATURE	+10°C ÷ + 25°C	+10°C ÷ + 25°C	+10°C ÷ + 25°C	+10°C ÷ + 25°C	+10°C ÷ + 25°C
APPLICATION	Notched trowel n° 5	Notched trowel n° 5	Notched trowel n° 5	Notched trowel n° 5	Notched trowel n° 7
POT-LIFE useful life of the A+B mix	2 h	2 h	2 h	1 h	n.a.
OPEN TIME	n.a.	n.a.	n.a.	n.a.	7 mins
COMPLETE HARDENING	36 - 48 h	48 h	48 - 72 h	36 - 48 h	48 - 72 h
COVERAGE g/m ²	1300 - 1900	1200 - 1800	1000 - 1600	1200 - 1800	900 - 1200
AVAILABLE COLOURS	Oak - Walnut (component B)	Oak - Walnut (component B)	Oak - Walnut (component A)	Oak - Walnut (component A)	Oak
STORAGE STABILITY	1 year	1 year	1 year	1 year	1 year
THINNING	DS	DS	DS	DMC 50	DS
TOOL CLEANING	DS	DS	DS	DMC 50	DS

PACKAGING KG	9+1			9+1	4,5 + 0,5		9+1			9+1			20	7	
PIECES PER CARTON	20B			20B			20B			12B			-	-	
EURO PALLET WEIGHT	Kg 800			Kg 800	Kg 600		Kg 800			Kg 750			Kg 880	Kg 840	

ADESIVER ELASTIC



1K adhesive based on a silane-terminated prepolymer (MS technology). Totally free of water, solvents, amines, tin, isocyanates and epoxy resins. Hypoallergenic, free of any hazardous label. Easy to clean. Recommended for gluing any type of traditional and preengineered wooden floors and suitable subfloors. Extreme (superior) technology than PU systems. Certified: EC1R Very good elasticity that last over the time.

UNISIL



1K adhesive based on a silane-terminated prepolymer (MS technology). Totally free of water, solvents, amines, tin, isocyanates and epoxy resins. Hypoallergenic, free of any hazardous label. Easy to clean. Recommended for gluing any type of traditional and preengineered wooden floors and suitable subfloors. Extreme (superior) technology than PU systems. Certified: EC1R, CCA, Acoustic barrier, Heat conductor. Approved by the best subfloor heating system producers. Superb elasticity that last over the time.



UNISIL OUTDOOR



1K adhesive based on a silane-terminated prepolymer (MS technology). Totally free of water, solvents, amines, tin, isocyanates and epoxy resins. Hypoallergenic, free of any hazardous label. Recommended for any type of outdoor wooden floors. **Available colours: black/white (on request and availability).**

MIXING RATIO	Single-component	Single-component	Single-component
APPLICATION TEMPERATURE	+15°C ÷ +25°C	+15°C ÷ +25°C	+15°C ÷ +25°C
APPLICATION	Notched trowel n° 5	Notched trowel n° 5	Notched trowel n° 5
OPEN TIME	1 h	1 h	1 h
COMPLETE HARDENING	36 - 48 h	36 - 48 h	36 - 48 h
COVERAGE g/m ²	800 - 1400	700 - 1200	> 1500
AVAILABLE COLOURS	Oak, Walnut	Oak	White
STORAGE STABILITY	9 months	9 months	9 months
THINNING	n.a.	n.a.	n.a.
TOOL CLEANING	DS	DS	DS

PACKAGING KG	10				15	Nr. 1 sausage 1000 ml	Nr. 1 sausage 600 ml			15	Nr. 1 sausage 600 ml	Nr. 1 cartridge 290 ml
PIECES PER CARTON	-				-	15	20			-	20	24
EURO PALLET WEIGHT	Kg 750				Kg 660	Nr. 540	Nr. 1000			Kg 825	Nr. 1000	Nr. 800

ADHESIVES

complementary

ADESIVER RPM



Self-expanding PU adhesive for repairing untreated and lacquered wooden floors.

ADESIVER ULTRA V



2K vinyl adhesive in a silicone gun for quick wooden floor repairs. Ideal when the wooden floor piece is removed. Also used for glueing brass doorsills and instantly securing wooden steps glued with 2K adhesives.

PARKETTKOLL KX



Special quick-drying adhesive for wooden floor repairs. Ideal for strengthening old wooden floors.

MIXING RATIO	Single-component	Self-mixing extruded	Single-component
APPLICATION TEMPERATURE	+10°C ÷ + 25°C	+10°C ÷ + 25°C	+10°C ÷ + 25°C
APPLICATION	Syringe	Silicone gun	Smooth trowel
OPEN TIME	n.a.	4 - 25 mins	n.a.
COMPLETE HARDENING	n.a.	n.a.	5 mins
COVERAGE g/m ²	2 h	4 - 25 mins	24 h
COLOUR	Amber	Dark Grey	Transparent
STORAGE STABILITY	6 months	1 year	1 year
THINNING	DMC 50	n.a.	n.a.
TOOL CLEANING	DMC 50	DNE	Water

PACKAGING KG	Nr. 1 bottle Kg 0,5				Nr. 1 cartridge ml 165				5			
PIECES PER CARTON	-				12				-			
EURO PALLET WEIGHT	-				-				Kg 600			

ADHESIVES FOR RESILIENT FLOORS

pvc - rubber - lino - carpet

ADESIVER
RE 400/N



1K adhesive in aqueous dispersion for glueing inside resilient and textile floors, lining and upholstery. Excellent thixotropy, low water content and strong adhesive force.

ADESIVER
RE 400 PLUS



1K adhesive in aqueous dispersion for glueing of PVC, coconut, polystyrene and cork.

ADESIVER
RE 400 EXTRA



Universal acrylic water-based 1K adhesive with excellent permanent stickiness for laying of resilient floors on absorbent and non-absorbent subfloors.

ADESIVER
RE 702 (A+B)



2K PU adhesive, water-free, to glue resilient materials for indoors and outdoors floors onto cement and water-proofed cements subfloors.

MIXING RATIO	Single-component	Single-component	Single-component	9:1
APPLICATION TEMPERATURE	+10°C ÷ + 25°C	+10°C ÷ + 25°C	+10°C ÷ + 25°C	+10°C ÷ + 25°C
APPLICATION	Notched trowel n° 1/3	Notched trowel n° 1/3	Notched trowel n° 1/3	Notched trowel n° 3/7
POT-LIFE useful life of the A+B mix	n.a.	n.a.	n.a.	1 h
OPEN TIME	20 - 45 mins	15 - 30 mins	20 - 45 mins	n.a.
COMPLETE HARDENING	48 - 72 h	48 - 72 h	48 - 72 h	36 - 48 h
COVERAGE g/m ²	300 - 400	250 - 350	250 - 350	300 - 800
AVAILABLE COLOURS	White	White	White	Beige
STORAGE STABILITY	2 years	2 years	2 years	1 year
THINNING	Water	Water	Water	DMC 50
TOOL CLEANING	Water	Water (with fresh adhesive)	Water (with fresh adhesive)	DMC 50

PACKAGING KG	20	12	5		20	12	5		20	12	5		9+1			
PIECES PER CARTON	-	-	-		-	-	-		-	-	-		-			
EURO PALLET WEIGHT	Kg 880	Kg 900	Kg 600		Kg 880	Kg 528	Kg 600		Kg 880	Kg 528	Kg 600		Kg 750			

ADESIVER
406 HV

New!



1K Polychloroprene double-buttering adhesive in solvent for glueing profiles, resilients and covings where an immediate bond is required.

ADESIVER
GREEN COURT (A+B)



2K PU adhesive for glueing syntetic turf.

MORTARS

RASOCHIM AL/
NIVELAND 10R



Self-levelling, smoothing and anti-shrink premixed mortar with super-rapid hardening for indoor uneven mineral subfloors.

QUARZ



Anhydrous quartz dust to be used for preparing synthetic mortar and filling in chases or deep cavities.

Single-component	8,5 / 1,5
+10°C ÷ + 25°C	0°C ÷ + 35°C
Spatula for contact adhesive	Notched trowel n° 3
n.a.	1 h
15 mins	n.a.
24 h	24 h
200 - 400	500 g/linear meter for to 40 cm wide jointing tape
Straw yellow	Green
1 year	1 year
-	DMC 50
DNE	DMC 50

5	0,85			8,5 + 1,5			
-	12			-			
Kg 600	Kg 612			Kg 750			

APPLICATION	Spatula or float	Spatula or float
COVERAGE	1,5 Kg/m ² /mm	n.a.
STEP ON TIME	2 - 3 h	24 h
COMPLETE HARDENING	12 - 24 h	24 h
THICKNESS	2 - 10 mm of each coat	Unlimited
LIFETIME OF PASTE	20 - 30 mins	n.a.
SPECIFIC WEIGHT	2,1 Kg/dm ³	2,65 Kg/dm ³
NOTES	Maximum thickness: 10 mm	

PACKAGING KG	25			10		
PIECES PER CARTON	-			-		
EURO PALLET WEIGHT	Kg 1050			-		

DNE



Thinner for tools cleaning (rollers, brushes, etc.) used for solvent-based products. Does not create white precipitate.

DNH 40



Thinner for tools cleaning (rollers, brushes, etc.) used for water-based products.

DMC 50



Anhydrous thinner prepared with topping solvents for diluting PU products.

APA



Thinner for cleaning and increasing adhesion on ceramic subfloors. Dilute to max 5% with epoxy adhesives.

	DNE			DNH 40			DMC 50			APA		
PACKAGING L	12,5	5		10	5		12,5	5		10	5	1
PIECES PER CARTON	-	-		-	-		-	-		-	-	12
EURO PALLET WEIGHT	L 750	L 660		L 800	L 700		L 750	L 660		L 800	L 700	L 540

	DNE	DNH 40	DMC 50	APA
For cleaning rollers and tools used with solvent-based products	●			
For cleaning rollers and tools used with water-based products		●		
For diluting PU products			●	
For lengthening dust-free time of solvent-based PU products			○	
For lengthening dust-free time of water-based PU products				
For diluting oil-based urethane varnishes				
For diluting Epoxy-PU adhesives and Epoxy primers				●
For cleaning pre-varnished wooden floors. N.B.: Test first			○	

DRV 1



Odourless synthetic thinner for wax, oil-based colours and oil-based urethane varnishes.

DS



Special thinner for removing fresh remains of epoxy-polyurethane two-component adhesives. Also good for diluting adhesives.

DR 22



Retardant thinner for polyurethane varnishes, used in hot weather or when varnishing large areas. Dilute to max 10%.

DR H2O



Retardant thinner for water based varnishes. Used in hot weather or when varnishing large areas.

DILUENTE PULIPAR W
Odorless



Water-based cleaner for removing fresh adhesive from pre-finished wooden floor.

DILUENTE PULIPAR



Thinner for removing fresh remains of adhesive, grease marks and dirt from pre-finished parquet floors. To be used also for removal of hardened SIGILPAR before mechanical removal.

12,5	5		10	5		12,5	5		1			1			1		
-	-		-	-		-	-		-			10			10		
L 750	L 660		L 800	L 660		L 750	L 660		-			L 500			L 500		

DRV 1	DS	DR 22	DR H2O	PULIPAR W	PULIPAR
		●			
			●		
●					
	○				
	○			●	●

Legend: ● Recommended product ○ Recommended alternative

DYES AND STAINS



Our laboratory can make colours and dyes to customer specifications.

DUROLACK MC SIGNAL (A+B)



2K PU lacquer for marking out games areas in gyms. Colour on request.

LTX 55



Water-based dye for wooden floors, available in white or light colours (light blue, pink, etc.) on request. The grain of wood still shows through.

PATINA EF 26



Specific product to dye the wood pore and gives the treated wood a particular chromatic appearance (Decapé effect). This patina fixes only to the pores of the wood thus creating a very pleasant contrast.

LACCATURA ALIFATICA MC 50 (A+B)



2k full glossy polyurethane aliphatic based top coat with very high mechanical resistance and extreme elasticity.

MIXING RATIO	1:1	Single-component	Single-component	2:1
APPLICATION	Roller - Brush	Brush - Sponge Cloth	Roller - Brush	Spray - Airless - Curtain coater
COVERAGE g/m ²	120	60-90	150	150
DUST DRY	1 h 30 mins	30 mins	5 mins	1 h
FINGERPRINT DRY	6 h	4 h	1 h	2 - 3 h
SANDING	24 h	Do not sand	2 - 3 h	12 - 24 h
NEXT RECOMMENDED TREATMENT	Durolack MC 50	Dopo 36 h Chim Tabu Prymer	Ecostar 2K	2 coats of laccatura alifatica mc 50 + 1 coat of laccatura alifatica mc 50 LD
THINNING	DMC 50	Water	DS	DMC 50
TOOL CLEANING	DNE	Water	DNE	DNE
NOTES AND WARNINGS	-	Test first on woods containing tannin. Apply evenly following the grain of the wood	-	-

PACKAGING KG	-				White	Coloured	White 25	White 10	White 5	White 1	Coloured	-			
PIECES PER CARTON	-				-	-	-	-	-	-	-	-			
EURO PALLET WEIGHT	-				-	-	-	-	-	-	-	-			

PRYMER AS



Anti-silicone solution, it minimises and almost eliminates during lacquering cratering due to silicone contamination. Use at 2% max.

PRYMER AT Extra



Specific product for the protection against wood-eating insects. It is particularly efficient against woodworm. Coverage: 100-200 g/m². Application: roller, brush, immersion.

ATTAKKO



Skirting boards and vertical parts adhesive. Very good start-up sealing. Colour: white.






USEFUL ADVICE	To be used in primer coats before applying the finishing coats. Sand well to prevent it from peeling at a later date.				Make sure Prymer AT Extra is completely dry before applying the primer. (It contains thinners that are incompatible with polyurethane products).				When gluing vertically, press hard for a few seconds.				
PACKAGING L	1				10	5	1			Nr. 1 cartridge 310 ml			
PIECES PER CARTON	10				-	-	12			24			
EURO PALLET WEIGHT	-				L 800	L 700	L 540			Nr. 1440			

CONVERTITORE DI RUGGINE



Thanks to its particular chemical composition, transforms the rust to a black and glossy metalorganic stable compound. It is ideal for rusty metal parts used for decking installation.

PACKAGING Kg	20	1			
PIECES PER CARTON	-	10			
EURO PALLET WEIGHT	L 720	L 500			

	PARKETKIT	STUCCO SIGILPAR	STUCCO S Holzmasse	STUCCO W Ecostucco	MOVER CM 2011
	 <p>Solvent and silicone free, odourless polyacrylate mastic for gluing baseboards, gaps between differing flooring elements, etc. May be painted over easily after hardens completely. Colours: oak, walnut, doussiè, iroko, beech, cherry, maple, white, wenge.</p>	 <p>Mixture of solvents, important "first pressing" oils, paraffins and flow inducing additives, which has been prepared for sealing the head and side joints of UV varnished parquet laths. Its high penetrating capacity ensures that the spaces between strips will repel water and dirt.</p>	 <p>Rapid solvent-based filler for wooden floors. Sandability: after 15 minutes. Available in different colours.</p>	 <p>Water-based filler for wooden floors. Sandability: after 1 hour. Available in different colours.</p>	 <p>Blend of harsh solvents and paraffins for removing old layers of glue or lacquer (adhesives for moquette, etc.). Application: brush, trowel. Coverage 400-500 g/m².</p>
USEFUL ADVICE	Wipe with a damp sponge after application.	Donot exceed quantities and treat small areas at a time.	Remove all excess filler from the surface of the wood to prevent the appearance of marks after varnishing.	Only use on very small cracks.	Apply twice in case of hard removing layers of glue or varnish. Wash with DNE thinner before gluing or varnishing. Wear PVC gloves during usage.
PACKAGING	Nr. 1 cartridge 310 ml	1	Nr. 1 1Kg	5	12,5 5
PIECES PER CARTON	24	10	6	-	-
EURO PALLET WEIGHT	Nr. 1440	L 500	-	-	L 750 L 660

World.White.Wall
CHIMIVER.com



Wall transpiring hydro painting
EXCELLENT WHITE.
ANTI-MOLD, BACTERICIDAL ACTION,
ANTI-CONDENSATION.

PACKAGING L	14	4		
PIECES PER CARTON	-	-		
EURO PALLET WEIGHT	L 462	L 144		

SAFETY BAG COMPLETE 626



Safety bag complete with all items you find with*.

SAFETY BAG 626



Empty safety bag.

ANTI NOISE EAR-FLAP *



PACKAGING Nr.	1					1						1				
PIECES PER CARTON	-					-						-				
EURO PALLET WEIGHT	-					-						-				

PROTECTING CREAM *



100 ml tube.

KNEE PADS *



PROTECTING GLASSES *



PACKAGING Nr.	1					1						1				
PIECES PER CARTON	24					-						-				
EURO PALLET WEIGHT	-					-						-				

ROLLER



Polyamide 4 mm for natural oils.

Microfiber 8 mm for water-based products.

Microfiber 12 mm for primer.



Mohair wool 6 mm recommended for solvent-based lacquers.

HANDLE FOR ROLLER



Universal handle for rollers.

HANDLE OMEGA



Calibrated handle for roller.

BRUSH CEILING SUPPORT



New brush ceiling support for the application for LIOS SUNDECK WOOD OIL, LIOS SUNDECK W, SCUDO WPC and LIOS HARD WAX BIOIL 3D.

PACKAGING Nr.	4 mm 1	8 mm 1	12 mm 1	6 mm 1			1						1			
PIECES PER CARTON	-	-	-	-			-						-			
EURO PALLET WEIGHT	-	-	-	-			-						-			

ANTINOISE EAR-FLAP WITH RADIO



NITRILE GLOVES *



Single use gloves. 100 pcs per box.

SPECIAL GLOVES FOR LAYING PARQUET *



High resistant gloves anti solvent, maximum sensibility washable.

MASK 3M 8812 *



Dust mask with breathing valve. 10 pcs per box.

MASK 3M A1P2 *



Vapour mask.

PACKAGING Nr.	1				1					1				1			
PIECES PER CARTON	-				100					10				-			
EURO PALLET WEIGHT	-				-					-				-			

FIRST AID BAG *



PROFESSIONAL OVERALL *



Overall with strip pockets and knee pads holders.

PAPER OVERALL *



Tyuek coverall antistatic, antidust.

PACKAGING Nr.	1				1					1							
PIECES PER CARTON	-				-					-				-			
EURO PALLET WEIGHT	-				-					-				-			

ROLLER KEEPER



Single roller container.

TROLLEY-BUCKET



Capacity 20 liters.

BUCKET FOR VARNISHING



Capacity 12 liters.

PACKAGING Nr.	1				1					1							
PIECES PER CARTON	-				-					-				-			
EURO PALLET WEIGHT	-				-					-				-			

BAGS FOR BUCKETS



Bags for buckets capacity 12/20 liters.
Dim.: 35x48 - 80x65

BRUSHES



Dim.: 50x15 - 70x15 - 3x7
3x12 - 3x14.

MANI PULITE



Hands cleaning cloth.
48 pcs.

PACKAGING Nr.	1				50x15 1	70x15 1	3x7 1	3x12 1	3x14 1	1			
PIECES PER CARTON	50				-	-	-	-	-	-			
EURO PALLET WEIGHT	-				-	-	-	-	-	-			

TOOL FOR ANTIDUST CLOTH



Chromed jointed tool with easy cloth application system.

PACKAGING Nr.	1			
PIECES PER CARTON	-			
EURO PALLET WEIGHT	-			

ELECTRODES M6 (couple)



Electrodes for cement moisture.

ELECTRODE M20



Electrode for wood moisture.

NAILS FOR TESTER

Steel nails 23 mm
40 mm.

PACKAGING Nr.	1				1				1			
PIECES PER CARTON	-				-				50			
EURO PALLET WEIGHT	-				-				-			


WORKING TOOLS

GRADUATED TRANSPARENT CAN




Capacity 1-3 liters.

NOTCHED TROWELS




-Smooth
-N° 3 (small)
-N° 5 (high)
-N° 7 (medium)

AMERICAN SPATULA CM. 28 - CM. 48

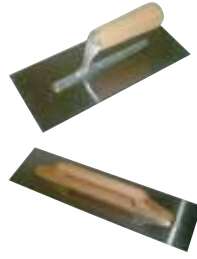

For levellings.

DOUBLE BLADE SPATULA



For application and levelling.


GUN FOR TUBES



-Tube gun for 600 ml capacity
-Tube gun for 1000 ml capacity (with air-pressure connector)

PACKAGING Nr.	L 1 1	L 3 1	1			cm 28 1	cm 48 1	1			MAN. AIR PRESSURE		
											600 ml 1	1000 ml 1	600 ml 1
PIECES PER CARTON	-	-	-	-	-	-	-	-	-	-	-	-	-
EURO PALLET WEIGHT	-	-	-	-	-	-	-	-	-	-	-	-	-

MATERASSINO MS




Roll's dimensions: 1,5m x 25m = 37,5 mq. Thickness: 3mm. Openings: 0,136 m² in each square meter.

CLOTH



Cloth for absorption of exceeding pro liquid (oil).

SPONGE



Sponge for oil manual application.

1			1			1						
-			-			-						
-			-			-						

HIDROMETTE HT 85



Electric moisture meter Hydromette (M20), suitable for wood/cement. Includes cables.

PACKAGING Nr.	1		
PIECES PER CARTON	-		
EURO PALLET WEIGHT	-		

MOISTURE METERS

CABLES HT 85



Spare cables for Hydromette.

CARBIDE HYGROTEST



Cement Moisture Gravimetric meter, complete with electronic comparison meter.

CARBIDE CHARGE



HYDROMETTE PROBE Compact B



Comparison non-destructive electronic meter.

HYDROMETTE PROBE Compact TF




Ambient moisture/temperature meter.

PACKAGING Nr.	1			1			1			1		
PIECES PER CARTON	-			-			20			-		
EURO PALLET WEIGHT	-			-			-			-		

ROLL

S. 422.
Combined cloth+paper.
Carborondum.

ROLL



R. 817. Blue cloth zirconium
oxide. High performances.

ROLL

R. 230. Cloth.
Aluminium oxide.

GRAIN	24	30	36	24	36	60	100	36	40	50	60	80/100
PACKAGING	mt 50	mt 50	mt 50	mt 50	mt 50	mt 50	mt 50	mt 50	mt 50	mt 50	mt 50	mt 50

DISCO


S. 413. Cloth + paper.
ø 425mm Hole 30 mm
Carborondum.

DISCO

H 425. Semi resin sand paper. ø 425mm Hole 30 mm
Carborondum.

GRAIN	16	20	24	30	36	40	50	60	80	100/120		
PACKAGING	Nr. 25	Nr. 25	Nr. 25	Nr. 25	Nr. 25	Nr. 25	Nr. 25	Nr. 25	Nr. 25	Nr. 25		

DISC



Velcro for lapping machine NOVA.
ø 150 mm. Zirconium oxide.

DISC

Velcro for cornered lapping machines.
ø 115 mm Aluminium oxide.

GRAIN	36	40	60	80	100	120	60	80	100	120		
PACKAGING	Nr. 50	Nr. 50	Nr. 50	Nr. 50	Nr. 50	Nr. 50	Nr. 50	Nr. 50	Nr. 50	Nr. 50		

BELT



R. 817. Blue cloth.
750 x 203 mm
Zirconium oxide.
High performances.

BELT



R. 230. Cloth. 750 x 203 mm
Aluminium oxide.

GRAIN	24	36			40	50	60	80	100	120		
PACKAGING	Nr. 10	Nr. 10			Nr. 10	Nr. 10	Nr. 10	Nr. 10	Nr. 10	Nr. 10		

ROLL



H. 425. Semi resin sand paper ideal for hard spices. Carborondum.

ROLL



H 231. Semi resin sand paper ideal for hard and fatty spices. Carborondum.

GRAIN	40	50	60	80	100	120	100	120	150	180		
PACKAGING	mt 50	mt 50	mt 50	mt 50	mt 50	mt 50	mt 50	mt 50	mt 50	mt 50		

SCREENS


DISC



Q 421. "SCREENBACK" resin. ø 406 mm


Velcro for multidisk. ø 105 mm Aluminium oxide.

DISC



Velcro . ø 180 mm Zirconium oxide.

DISC



Paper. ø 180 mm Hole 22 mm Aluminium oxide.

60 / 80 / 100 / 120 150 / 180 / 220 / 320	40	60	80 / 100 / 120	24	36	50/60	80 / 100	24 (oxide of Zirconium)	36 (oxide of Zirconium)	50	60	80	100	120
Nr. 20	Nr. 50	Nr. 50	Nr. 50	Nr. 50	Nr. 50	Nr. 50	Nr. 50	Nr. 50	Nr. 50	Nr. 50	Nr. 50	Nr. 50	Nr. 50	Nr. 50

DISC

Velcro for TRIO cornered lapping machines. ø 200 mm Ceramic mineral.

DISC

Net for TRIO lapping machine. ø 200 mm

PADS



GREEN (Net, waxing)
YELLOW/WHITE (Polishing)
BLACK (Cleaning, dewaxing).

GRAIN	60	80	120		80/100/120				
PACKAGING	Nr. 50	Nr. 50	Nr. 50		Nr. 50				

HIGH PRO DISC



For sanding (300/400 m²) for preparation of wooden floors which have to be oiled.

WHITE PAD



Use and throwaway economic felt.

PAD 28x12

Lightly abrasive pad.

GRAIN	1				1				1			
PACKAGING	-				-				-			